



305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.0010	10.0	4.0	9.0	7.5	0.6
0.0012	10.0	4.0	9.0	7.5	0.6
0.0015	10.0	4.0	9.0	7.5	0.6
0.0018	10.0	4.0	9.0	7.5	0.6
0.0022	10.0	4.0	9.0	7.5	0.6
0.0033	10.0	4.0	9.0	7.5	0.6
0.0047	10.0	4.0	9.0	7.5	0.6
0.0056	10.0	4.0	9.0	7.5	0.6
0.0068	10.0	4.0	9.0	7.5	0.6
0.0082	10.0	4.0	9.0	7.5	0.6
0.010	10.0	4.0	9.0	7.5	0.6
0.012	10.0	4.0	9.0	7.5	0.6
0.015	10.0	4.0	9.0	7.5	0.6
0.018	10.0	4.0	9.0	7.5	0.6
0.022	10.0	4.0	9.0	7.5	0.6
0.027	10.0	5.0	10.0	7.5	0.6
0.033	10.5	5.0	11.0	7.5	0.6
0.033	10.0	5.0	10.0	7.5	0.6
0.039	10.0	5.0	10.0	7.5	0.6
0.039	10.5	5.0	11.0	7.5	0.6
0.047	10.0	5.0	10.0	7.5	0.6
0.047	10.5	5.0	11.0	7.5	0.6
0.056	10.5	5.0	11.0	7.5	0.6
0.068	10.5	6.0	12.0	7.5	0.6
0.082	10.5	6.0	12.0	7.5	0.6
0.10	10.0	7.0	13.0	7.5	0.6

305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.0022	13.0	4.0	9.0	10.0	0.6
0.0033	13.0	4.0	9.0	10.0	0.6
0.0047	13.0	4.0	9.0	10.0	0.6
0.0047	13.0	5.0	11.0	10.0	0.6
0.0056	13.0	4.0	9.0	10.0	0.6
0.0056	13.0	5.0	11.0	10.0	0.6
0.0068	13.0	4.0	9.0	10.0	0.6
0.0068	13.0	5.0	11.0	10.0	0.6
0.0082	13.0	4.0	9.0	10.0	0.6
0.0082	13.0	5.0	11.0	10.0	0.6
0.010	13.0	4.0	9.0	10.0	0.6
0.010	13.0	5.0	11.0	10.0	0.6
0.012	13.0	4.0	9.0	10.0	0.6
0.012	13.0	5.0	11.0	10.0	0.6
0.015	13.0	4.0	9.0	10.0	0.6
0.015	13.0	5.0	11.0	10.0	0.6
0.018	13.0	4.0	9.0	10.0	0.6
0.018	13.0	5.0	11.0	10.0	0.6
0.022	13.0	4.0	9.0	10.0	0.6
0.022	13.0	5.0	11.0	10.0	0.6
0.027	13.0	4.0	9.0	10.0	0.6
0.027	13.0	5.0	11.0	10.0	0.6
0.033	13.0	4.0	9.0	10.0	0.6
0.033	13.0	5.0	11.0	10.0	0.6
0.039	13.0	4.0	9.0	10.0	0.6
0.039	13.0	5.0	11.0	10.0	0.6

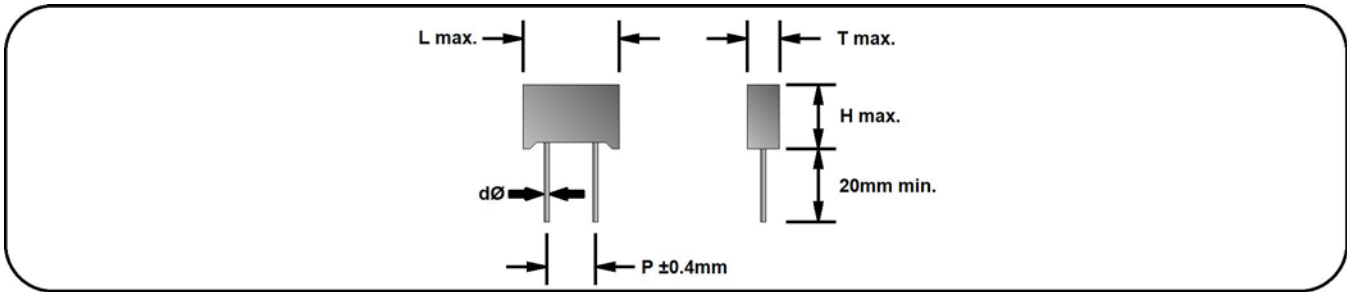


305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.039	13.0	6.0	12.0	10.0	0.6
0.047	13.0	4.0	9.0	10.0	0.6
0.047	13.0	5.0	11.0	10.0	0.6
0.047	13.0	6.0	12.0	10.0	0.6
0.047	13.0	7.0	13.0	10.0	0.6
0.056	13.0	4.0	8.0	10.0	0.6
0.056M	13.0	4.5	9.0	10.0	0.6
0.056	13.0	5.0	11.0	10.0	0.6
0.056	13.0	6.0	12.0	10.0	0.6
0.056	13.0	7.0	13.0	10.0	0.6
0.068	13.0	5.0	11.0	10.0	0.6
0.068	13.0	6.0	12.0	10.0	0.6
0.068	13.0	7.0	13.0	10.0	0.6
0.082	13.0	5.0	11.0	10.0	0.6
0.082	13.0	6.0	12.0	10.0	0.6
0.082	13.0	7.0	13.0	10.0	0.6
0.1	13.0	5.0	11.0	10.0	0.6
0.1	13.0	6.0	12.0	10.0	0.6
0.10M	13.0	8.0	14.0	10.0	0.6
0.12	13.0	6.0	12.0	10.0	0.6
0.12	13.0	7.0	13.0	10.0	0.6
0.15	13.0	6.0	12.0	10.0	0.6
0.15	13.0	7.0	12.0	10.0	0.6
0.15	13.0	7.0	13.0	10.0	0.6
0.15	13.0	8.0	14.0	10.0	0.6
0.18	13.0	7.0	13.0	10.0	0.6

305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.18	13.0	8.0	14.0	10.0	0.6
0.22	13.0	8.0	14.0	10.0	0.6
0.15	15.0	6.0	11.5	12.5	0.6
0.22	15.0	7.0	12.5	12.5	0.6
0.22	15.0	8.5	14.0	12.5	0.6
0.33	15.0	8.5	14.0	12.5	0.6
0.33	15.0	10.0	16.0	12.5	0.6
0.39	15.0	9.0	15.0	12.5	0.6
0.47	15.0	10.0	18.0	12.5	0.6
0.56	15.0	11.0	17.0	12.5	0.8
0.01	18.0	5.0	11.0	15.0	0.6/0.8
0.015	18.0	5.0	11.0	15.0	0.6/0.8
0.018	18.0	4.0	10.0	15.0	0.6/0.8
0.018	18.0	5.0	11.0	15.0	0.6/0.8
0.022	18.0	4.0	10.0	15.0	0.6/0.8
0.022	18.0	5.0	11.0	15.0	0.6/0.8
0.027	18.0	4.0	10.0	15.0	0.6/0.8
0.027	18.0	5.0	11.0	15.0	0.6/0.8
0.033	18.0	4.0	10.0	15.0	0.6/0.8
0.033	18.0	5.0	11.0	15.0	0.6/0.8
0.039	18.0	4.0	10.0	15.0	0.6/0.8
0.039	18.0	5.0	11.0	15.0	0.6/0.8
0.047	18.0	4.0	10.0	15.0	0.6/0.8
0.047	18.0	5.0	11.0	15.0	0.6/0.8
0.056	18.0	4.0	10.0	15.0	0.6/0.8
0.056	18.0	5.0	11.0	15.0	0.6/0.8

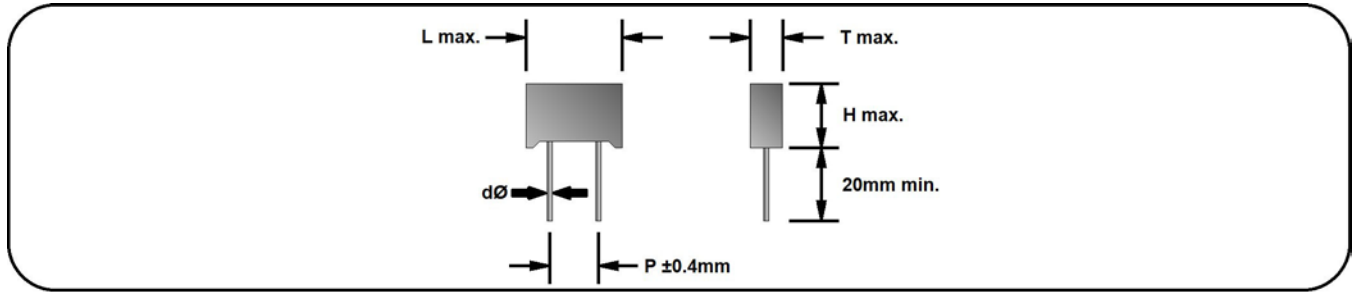


305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.068	18.0	4.0	10.0	15.0	0.6/0.8
0.068	18.0	5.0	11.0	15.0	0.6/0.8
0.082	18.0	5.0	10.0	15.0	0.6/0.8
0.082	18.0	5.0	11.0	15.0	0.6/0.8
0.082	18.0	6.0	12.0	15.0	0.8
0.10	18.0	5.0	11.0	15.0	0.6/0.8
0.10	18.0	6.0	12.0	15.0	0.6/0.8
0.10	18.0	6.0	13.5	15.0	0.6/0.8
0.12	18.0	5.0	11.0	15.0	0.6/0.8
0.12	18.0	6.0	12.0	15.0	0.6/0.8
0.12	18.0	7.5	13.5	15.0	0.6/0.8
0.15	18.0	5.0	10.5	15.0	0.6/0.8
0.15	18.0	6.0	12.0	15.0	0.6/0.8
0.15	18.0	6.0	13.5	15.0	0.6/0.8
0.15	18.0	7.5	13.5	15.0	0.6/0.8
0.15	18.0	8.5	14.5	15.0	0.8
0.18	18.0	5.0	11.0	15.0	0.6/0.8
0.18	18.0	6.0	12.0	15.0	0.6/0.8
0.18	18.0	7.5	13.5	15.0	0.6/0.8
0.22	18.0	6.0	11.5	15.0	0.6/0.8
0.22	18.0	6.0	13.5	15.0	0.6/0.8
0.22	18.0	7.0	13.0	15.0	0.6/0.8
0.22	18.0	7.5	13.5	15.0	0.6/0.8
0.22	18.0	8.5	14.5	15.0	0.8
0.22	18.0	9.5	15.5	15.0	0.8
0.27	18.0	6.0	13.5	15.0	0.6/0.8

305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.27	18.0	8.5	14.5	15.0	0.8
0.27	18.0	10.0	16.5	15.0	0.8
0.33	18.0	7.0	13.0	15.0	0.6/0.8
0.33	18.0	7.5	17.5	15.0	0.6/0.8
0.33	18.0	8.5	14.5	15.0	0.8
0.33	18.0	9.5	15.5	15.0	0.8
0.33	18.0	10.0	16.5	15.0	0.8
0.33	18.0	11.0	18.5	15.0	0.8
0.39	18.0	7.5	13.5	15.0	0.6/0.8
0.39	18.0	10.0	16.5	15.0	0.8
0.39	18.0	11.0	18.5	15.0	0.8
0.47M	18.0	8.5	16.5	15.0	0.8
0.47	18.0	8.5	16.5	15.0	0.8
0.47	18.0	9.0	13.5	15.0	0.8
0.47	18.0	9.5	17.5	15.0	0.8
0.47M	18.0	10.0	16.5	15.0	0.8
0.47	18.0	11.0	18.5	15.0	0.8
0.56	18.0	9.0	15.0	15.0	0.8
0.56	18.0	11.0	18.5	15.0	0.8
0.68M	18.0	10.0	16.5	15.0	0.8
0.68M	18.0	11.0	18.5	15.0	0.8
0.68M	18.0	11.0	19.0	15.0	0.8
0.82M	18.0	10.0	18.0	15.0	0.8
0.82	18.0	11.0	18.5	15.0	0.8
0.82	18.0	11.0	19.0	15.0	0.8
1.0M	18.0	11.0	19.0	15.0	0.8

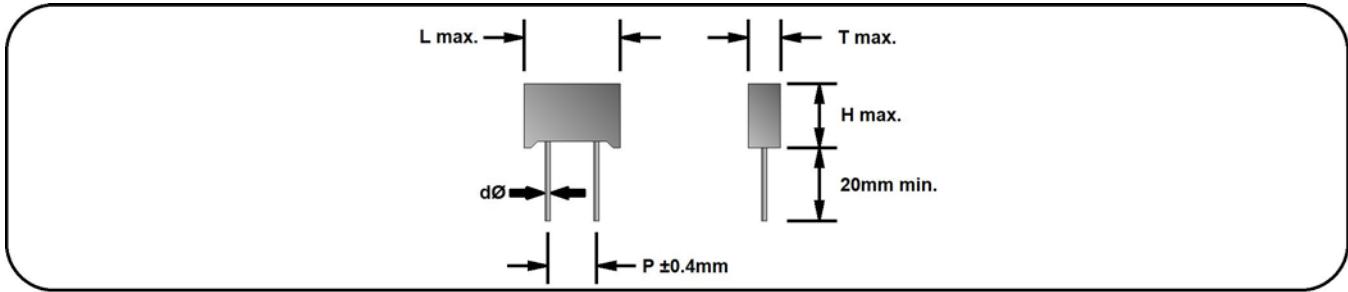


305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
1.0	18.0	12.5	21.0	15.0	0.8
0.15	26.5	6.0	15.0	22.5	0.8
0.18	26.5	6.0	15.0	22.5	0.8
0.22	26.5	6.0	15.0	22.5	0.8
0.27	26.5	6.0	15.0	22.5	0.8
0.27	26.5	7.0	16.5	22.5	0.8
0.33	26.5	6.0	15.0	22.5	0.8
0.33	26.5	7.0	16.5	22.5	0.8
0.33	26.5	8.5	17.0	22.5	0.8
0.39	26.5	6.0	15.0	22.5	0.8
0.39M	26.5	7.0	16.5	22.5	0.8
0.39	26.5	8.5	17.0	22.5	0.8
0.39	26.5	10.0	19.0	22.5	0.8
0.47	26.5	6.0	15.0	22.5	0.8
0.47	26.5	7.0	16.5	22.5	0.8
0.47	26.5	8.5	17.0	22.5	0.8
0.47	26.5	10.0	19.0	22.5	0.8
0.56	26.5	6.0	15.0	22.5	0.8
0.56	26.5	8.5	17.0	22.5	0.8
0.56	26.5	10.0	19.0	22.5	0.8
0.56	26.5	11.0	20.0	22.5	0.8
0.68	26.5	8.5	17.0	22.5	0.8
0.68	26.5	10.0	19.0	22.5	0.8
0.68	26.5	12.0	22.0	22.5	0.8
0.82	26.5	8.5	17.0	22.5	0.8
0.82M	26.0	8.5	18.5	22.5	0.8

305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.82	26.0	11.0	20.0	22.5	0.8
0.82	26.5	13.0	23.0	22.5	0.8
1.0	26.5	8.5	17.0	22.5	0.8
1.0	26.0	8.5	18.5	22.5	0.8
1.0	26.0	11.0	20.0	22.5	0.8
1.0	26.0	12.0	22.0	22.5	0.8
1.0	26.0	15.0	25.0	22.5	0.8
1.2	26.0	6.0	22.0	22.5	0.8
1.2	26.5	10.0	19.0	22.5	0.8
1.2M	26.0	11.0	20.0	22.5	0.8
1.2	26.0	13.5	24.0	22.5	0.8
1.5	26.0	10.0	21.0	22.5	0.8
1.5	26.0	11.0	20.0	22.5	0.8
1.5M	26.0	12.0	22.0	22.5	0.8
1.5	26.0	15.0	25.0	22.5	0.8
1.8	26.0	12.0	22.0	22.5	0.8
1.8	26.0	15.0	25.0	22.5	0.8
2.0	26.5	13.0	23.0	22.5	0.8
2.2	26.0	13.5	24.0	22.5	0.8
2.2	26.5	14.0	23.0	22.5	0.8
2.2	26.5	14.5	29.5	22.5	0.8
0.47	31.0	7.5	16.0	27.5	0.8
0.47	32.0	9.0	18.0	27.5	0.8
0.47	32.0	11.0	20.0	27.5	0.8
0.56	31.0	7.5	16.0	27.5	0.8
0.56	32.0	9.0	18.0	27.5	0.8

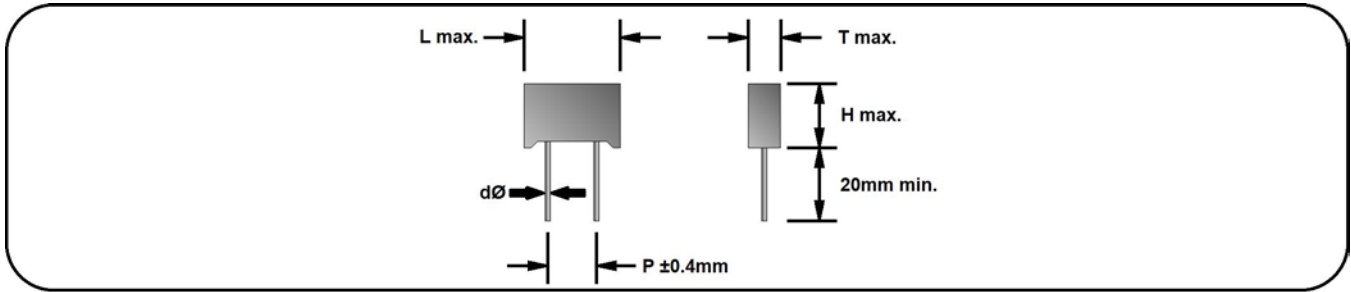


305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.56	32.0	11.0	20.0	27.5	0.8
0.68	31.0	7.5	16.0	27.5	0.8
0.68	31.0	7.5	16.0	27.5	0.8
0.68	32.0	9.0	18.0	27.5	0.8
0.68	32.0	11.0	20.0	27.5	0.8
0.82	31.0	7.5	16.0	27.5	0.8
0.82	31.0	8.0	17.0	27.5	0.8
0.82	32.0	9.0	18.0	27.5	0.8
0.82	32.0	11.0	20.0	27.5	0.8
0.82	31.0	13.0	22.0	27.5	0.8
1.0	31.0	8.0	17.0	27.5	0.8
1.0	32.0	9.0	18.0	27.5	0.8
1.0	32.0	11.0	20.0	27.5	0.8
1.0	31.0	13.0	22.0	27.5	0.8
1.2	31.0	8.0	17.0	27.5	0.8
1.2	32.0	9.0	18.0	27.5	0.8
1.2	32.0	11.0	20.0	27.5	0.8
1.2	31.0	13.0	22.0	27.5	0.8
1.2	31.0	14.0	25.0	27.5	0.8
1.5M	32.0	9.0	18.0	27.5	0.8
1.5	32.0	11.0	20.0	27.5	0.8
1.5M	32.0	11.0	20.0	27.5	0.8
1.5	31.0	14.0	23.5	27.5	0.8
1.5	31.5	16.0	23.5	27.5	0.8
1.8	32.0	11.0	20.0	27.5	0.8
1.8	31.0	11.8	21.0	27.5	0.8

305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
1.8	31.0	13.0	22.0	27.5	0.8
1.8	31.0	14.0	25.0	27.5	0.8
1.8	31.0	18.0	26.0	27.5	0.8
2.0	32.0	15.0	30.0	27.5	0.8
2.2	31.0	13.0	22.0	27.5	0.8
2.2	31.0	14.0	25.0	27.5	0.8
2.2	32.0	15.0	30.0	27.5	0.8
2.2	31.0	18.0	26.0	27.5	0.8
2.7	31.0	13.0	22.0	27.5	0.8
2.7	32.0	16.0	25.5	27.5	0.8
2.7M	32.0	18.0	28.0	27.5	0.8
3.3	31.0	14.0	25.0	27.5	0.8
3.3	31.0	15.5	29.0	27.5	0.8
3.3	31.0	18.0	26.0	27.5	0.8
3.3	31.0	18.0	33.0	27.5	0.8
3.9	31.5	16.0	25.5	27.5	0.8
3.9	32.0	19.0	29.0	27.5	0.8
3.9	32.0	22.0	37.0	27.5	0.8
4.7	31.0	18.0	26.0	27.5	0.8
4.7M	31.0	18.0	33.0	27.5	0.8
4.7M	32.0	22.0	37.0	27.5	0.8
5.6M	31.0	18.0	33.0	27.5	0.8
5.6	32.0	20.5	37.0	27.5	0.8
6.8M	31.0	18.0	33.0	27.5	0.8
2.2	37.0	15.0	26.0	27.5	0.8
1.5	41.0	11.0	22.0	32.5	1.0

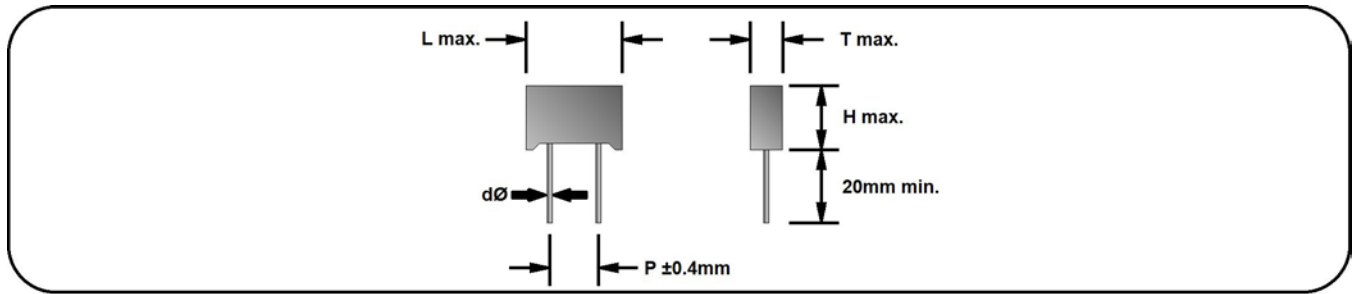



305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
1.5	41.0	13.0	24.0	37.5	1.0
1.8M	41.0	11.0	22.0	37.5	1.0
1.8M	41.0	13.0	24.0	37.5	1.0
2.2	41.0	11.0	22.0	37.5	1.0
2.2	41.0	13.0	24.0	37.5	1.0
2.7	41.0	13.0	24.0	37.5	1.0
2.7	41.0	16.0	28.5	37.5	1.0
3.3	42.0	14.0	28.0	37.5	1.0
3.3	41.0	16.0	28.5	37.5	1.0
3.3	42.0	18.0	31.5	37.5	1.0
3.9	42.0	16.0	28.5	37.5	1.0
3.9M	41.5	17.0	30.0	37.5	1.0
4.7	41.5	17.0	30.0	37.5	1.0
4.7	41.5	24.0	31.4	37.5	1.0
4.7	41.5	25.0	38.0	37.5	1.0
5.6	42.0	18.0	31.5	37.5	1.0
5.6	41.5	22.5	35.5	37.5	1.0
5.6	41.5	25.0	38.0	37.5	1.0
6.8	41.5	20.5	34.0	37.5	1.0
6.8M	41.5	22.5	35.5	37.5	1.0
8.2	42.0	22.0	37.0	37.5	1.0
8.2M	41.5	25.0	38.0	37.5	1.0
10.0	41.5	22.5	35.5	37.5	1.0
10M	41.5	22.5	35.5	37.5	1.0
10.0	41.5	26.0	39.0	37.5	1.0
10M	41.5	27.5	41.0	37.5	1.0

305 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
10.0	41.5	30.0	45.0	37.5	1.0
12.0	41.5	26.0	39.0	37.5	1.0
12.0	41.5	27.5	41.0	37.5	1.0
12.0	42.5	33.0	45.0	37.5	1.0
15.0	41.5	27.5	41.0	37.5	1.0
15.0	42.5	33.0	45.0	37.5	1.0
18.0	42.5	33.0	45.0	37.5	1.0
18M	42.5	33.0	45.0	37.5	1.0
22.0	42.5	33.0	45.0	37.5	1.0
10.0	58.0	26.0	38.0	52.5	1.2
12.0	58.5	24.0	36.0	52.5	1.2
12.0	58.0	26.0	38.0	52.5	1.2
15.0	58.0	26.0	38.0	52.5	1.2
15.0	57.5	30.0	45.0	52.5	1.2
18.0	57.8	30.0	45.0	52.5	1.2
18.0	59.0	33.0	50.0	52.5	1.2
22.0	59.0	33.0	43.0	52.5	1.2
22M	58.0	35.0	50.0	52.5	1.2
22.0	58.0	38.0	53.0	52.5	1.2
25.0	58.0	35.0	50.0	52.5	1.2
25.0	58.0	35.0	60.0	52.5	1.2

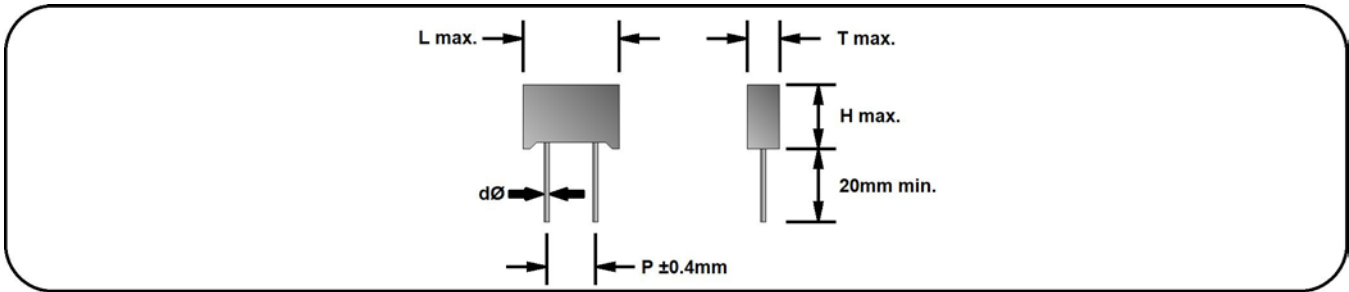

350 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.010	13.0	4.0	9.0	10.0	0.6
0.012	13.0	4.0	9.0	10.0	0.6
0.015	13.0	4.0	9.0	10.0	0.6
0.018	13.0	4.0	9.0	10.0	0.6
0.022	13.0	4.0	9.0	10.0	0.6
0.027	13.0	5.0	11.0	10.0	0.6
0.033	13.0	5.0	11.0	10.0	0.6
0.039	13.0	5.0	11.0	10.0	0.6
0.047	13.0	6.0	12.0	10.0	0.6
0.056	13.0	6.0	12.0	10.0	0.6
0.010	18.0	5.0	10.0	15.0	0.6
0.012	18.0	5.0	10.0	15.0	0.6
0.015	18.0	5.0	10.0	15.0	0.6
0.018	18.0	5.0	10.0	15.0	0.6
0.022	18.0	5.0	10.0	15.0	0.6
0.027	18.0	5.0	10.0	15.0	0.6
0.033	18.0	5.0	10.0	15.0	0.6
0.039	18.0	5.0	10.0	15.0	0.6
0.047	18.0	5.0	10.0	15.0	0.6
0.056	18.0	5.0	11.0	15.0	0.6
0.068	18.0	5.0	11.0	15.0	0.6
0.082	18.0	5.0	11.0	15.0	0.6
0.100	18.0	6.0	12.0	15.0	0.6
0.120	18.0	6.0	12.0	15.0	0.6
0.150	18.0	7.5	13.5	15.0	0.6
0.180	18.0	7.5	13.5	15.0	0.6

350 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.220	18.0	8.5	14.5	15.0	0.6
0.270	18.0	10.0	16.5	15.0	0.8
0.330	18.0	10.0	16.5	15.0	0.8
0.390	18.0	11.0	19.0	15.0	0.8
0.470	18.0	11.0	19.0	15.0	0.8
0.100	26.5	6.0	15.0	22.5	0.8
0.120	26.5	6.0	15.0	22.5	0.8
0.150	26.5	6.0	15.0	22.5	0.8
0.180	26.5	6.0	15.0	22.5	0.8
0.220	26.5	6.0	15.0	22.5	0.8
0.270	26.5	6.0	15.0	22.5	0.8
0.330	26.5	7.0	16.5	22.5	0.8
0.390	26.5	8.5	17.0	22.5	0.8
0.470	26.5	8.5	17.0	22.5	0.8
0.560	26.5	10.0	19.0	22.5	0.8
0.680	26.5	10.0	19.0	22.5	0.8
0.820	26.0	11.0	20.0	22.5	0.8
1.000	26.5	13.0	23.0	22.5	0.8
1.200	26.5	14.0	23.0	22.5	0.8
1.500	26.5	15.0	25.0	22.5	0.8
0.220	32.0	9.0	18.0	27.5	0.8
0.270	32.0	9.0	18.0	27.5	0.8
0.330	32.0	9.0	18.0	27.5	0.8
0.390	32.0	9.0	18.0	27.5	0.8
0.470	32.0	9.0	18.0	27.5	0.8
0.560	32.0	9.0	18.0	27.5	0.8

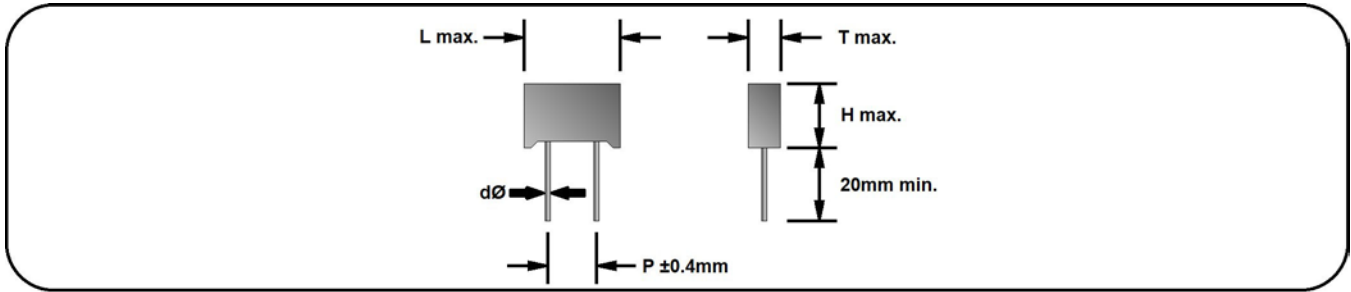

350 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
0.680	32.0	9.0	18.0	27.5	0.8
0.820	32.0	11.0	20.0	27.5	0.8
1.000	32.0	11.0	20.0	27.5	0.8
1.200	32.0	13.0	22.0	27.5	0.8
1.500	31.0	14.0	25.0	27.5	0.8
1.800	31.0	15.0	24.5	27.5	0.8
2.200	32.0	15.0	30.0	27.5	0.8
2.700	31.0	18.0	33.0	27.5	0.8
3.300	31.0	18.0	33.0	27.5	0.8
3.900	32.0	22.0	37.0	27.5	0.8
4.700	32.0	22.0	37.0	27.5	0.8
0.330	41.0	11.0	22.0	37.5	1.0
0.390	41.0	11.0	22.0	37.5	1.0
0.470	41.0	11.0	22.0	37.5	1.0
0.560	41.0	11.0	22.0	37.5	1.0
0.680	41.0	11.0	22.0	37.5	1.0
0.820	41.0	11.0	22.0	37.5	1.0
1.000	41.0	11.0	22.0	37.5	1.0
1.200	41.0	11.0	22.0	37.5	1.0
1.500	41.0	11.0	22.0	37.5	1.0
1.800	41.0	13.0	24.0	37.5	1.0
2.200	41.0	16.0	28.0	37.5	1.0
2.700	41.0	16.0	28.0	37.5	1.0
3.300	41.5	17.0	30.0	37.5	1.0
3.900	42.0	18.0	31.5	37.5	1.0
4.700	41.5	20.5	34.0	37.5	1.0

350 VAC					
CAP (MFD)	L	T	H	P (mm)	d (mm)
5.600	41.0	22.0	37.0	37.5	1.0
6.800	41.0	22.0	37.0	37.5	1.0
6.800	41.5	27.5	41.0	37.5	1.0
8.200	41.5	27.5	41.0	37.5	1.0
10.000	41.5	30.0	45.0	37.5	1.0
12.000	42.5	33.0	45.0	37.5	1.0
15.000	57.0	30.0	45.0	52.5	1.2
18.000	57.5	35.0	45.0	52.5	1.2
20.000	58.0	35.0	50.0	52.5	1.2

GENERAL SPECIFICATIONS

PHYSICAL CHARACTERISTICS

CONSTRUCTION: NON-INDUCTIVE WOUND METALLIZED POLYPROPYLENE.
CASE: FLAME RETARDANT PREFORMED CASE WITH EPOXY FILL.
LEAD MATERIAL: SOLDER COATED OR TINNED SOLID WIRE. AWG AS SPECIFIED IN TABLES.
DIMENSIONS: AS SPECIFIED IN TABLES.

ELECTRICAL CHARACTERISTICS

Maximum pulse rise time (dv/dt) V/μsec	P	10	15	22.5	27.5	37.5	52.5
	V/μsec	400	300	180	120	70	40

CAPACITANCE: AS SPECIFIED IN TABLES ± 10% OR 20% WHEN MEASURED AT OR REFERRED TO 1000 ± 20 HZ AND 25 ± 5 °C.

TOLERANCE: ±10% OR ±20% (INDICATED BEHIND THE CAP VALUE "M")

DISSIPATION FACTOR: SHALL NOT BE GREATER THAN 0.1% WHEN MEASURED AT OR REFERRED TO 1000 HZ 20 ± 3 °C.

INSULATION RESISTANCE: SHALL BE GREATER THAN 30,000 MΩ FOR CAPACITANCE VALUES 0.33 μF AND LESS OR 10,000 MΩ x μF FOR CAPACITANCE VALUES GREATER THAN 0.33 μF WHEN MEASURED AFTER 1 MINUTE ELECTRIFICATION AT 100VDC AND 20 ± 3 °C.

DIELECTRIC STRENGTH: 275 VAC, 1183 VDC FOR 1 MIN
 305 VAC, 1312 VDC FOR 1 MIN
 310 VAC, 1333 VDC FOR 1 MIN
 350 VAC, 1505 VDC FOR 1 MIN

RATED VOLTAGE: 305VAC FOR UL, CUL, ENEC, DEMKO, AND CQC. 305VAC/350VAC FOR VDE, SEV, SEMKO, NEMKO, DEMKO, AND FIMKO

TEMPERATURE: -40 °C TO +105 °C AT FULL RATED VOLTAGE.

ADDITIONAL INFORMATION

ORDERING INFORMATION: ALL ASC CAPACITORS ARE ORDERED BY "FAMILY CAP-TOL-VOLT" DESIGNATION. BECAUSE SOME VALUES ARE AVAILABLE IN DIFFERENT LEAD SPACINGS AND SIZES, CASE SIZE MUST ALSO BE INCLUDED IN PARENTHESIS AFTER THE FAMILY. (I.E. TO ORDER AN PXK 0.22μF, ±10%, 275VAC CAPACITOR WITH 15MM LS IN THE 9.5MM X 15.5MM X 18MM CASE , REQUEST PART NUMBER "PXK(9.5X15.5X18) 0.22-10-275")

AGENCY APPROVALS:
 RECOGNIZED BY THE FOLLOWING AGENCIES:
 UL/CUL FILE NUMBER E178496

SEE ALSO: "GENERAL INFORMATION - POLYPROPYLENE CAPACITORS" DOCUMENT FOR ADDITIONAL PHYSICAL, ELECTRICAL, AND PERFORMANCE CHARACTERISTICS NOT MENTIONED IN THIS FILE.

WARNING: INFORMATION ON THIS FILE IS SUBJECT TO CHANGE WITHOUT NOTICE AT ASC'S DISCRETION.

LAST MODIFIED: 1/21/2025